



# PICOTEST

## Signal Injectors

---



## Documentation

Version 1.03, November, 2012

Copyright © 2011-2012 Picotest

All Rights Reserved

## **Trademarks**

The Picotest logo and “Picotest Injectors” are trademarks of Picotest Corp.

All other brand and product names mentioned herein are used for identification purposes only and are registered trademarks, trademarks, or service marks of their respective holders.

## **Copyright notice**

Except as permitted under the United States Copyright Act of 1976, no part of this publication may be reproduced or distributed in any form or by any means, or stored in a data base or retrieval system, without the prior written permission of Picotest Corp.

## **Contact information**

PICOTEST Corp.

Technical support e-mail: [sales@picotest.com.tw](mailto:sales@picotest.com.tw)

World Wide Web: <http://www.picotest.com.tw>

## Table of Contents

<b>Chapter 1 - Overview</b> .....	<b>5</b>
Welcome .....	5
What's Included .....	5
Documentation and Support .....	6
Warranty.....	6
Calibration.....	6
Safety Information.....	6
Symbols and Terms .....	7
<b>Chapter 2 – Introduction to Signal Injectors</b> .....	<b>8</b>
Introduction.....	8
Injection Transformers – J2100A & J21101A.....	8
Solid State Voltage Injector – J2110A .....	10
Solid State Current Injectors – J2111A & J2112A.....	11
Line Injector – J2120A .....	12
Bias Injector – J2130A .....	13
Attenuators – J2140A.....	13
Preamplifier – J2180A.....	14
Active Filter – J2190A.....	14
<b>Chapter 3 - Signal Injectors: Measurements and Specifications</b> .....	<b>15</b>
J2100A/J2101A Injection Transformers.....	15
Main Features .....	15
Description.....	15
Connecting the Injection Transformer: Stability .....	17
Technical Specifications: J2100A .....	18
Technical Specifications: J2101A.....	19
J2110A Solid State Voltage Injector.....	20
Main Features .....	20
Description.....	20
Connecting the Solid State Injector: : Stability .....	20
Technical Specifications .....	21
J2120A Line Injector.....	22
Main Features .....	22
Description.....	22
Connecting the Line Injector: PSRR.....	22
Measuring Input Impedance.....	23
Connecting the Line Injector: Input Impedance.....	23
Technical Specifications .....	24
J2130A DC Bias Injector.....	24
Main Features .....	24
Description.....	24

---

Technical Specifications .....	25
J2111A/J2112A Solid State Current Injector .....	26
Main Features .....	26
Description.....	26
Connecting the Current Injector: Output Impedance.....	27
Connecting the Current Injector: Reverse Transfer.....	27
Technical Specifications .....	28
J2170A High PSRR Power Supply Adapter .....	30
Main Features .....	30
Description.....	30
J2140A Attenuators.....	30
Main Features .....	30
Description.....	31
Technical Specifications .....	31
J2180A 0.1Hz to 100MHz Ultra Low Noise Preamp .....	32
Main Features .....	32
Description.....	32
Connecting the Preamp: EMI and Noise Measurements .....	33
Technical Specifications .....	34
J2190A 0.1Hz to 10Hz Active Filter.....	35
Main Features .....	35
Description.....	35
Injector Input/Output Impedances.....	36
<b>Chapter 4 - References .....</b>	<b>37</b>
General.....	37
<b>J21XXA Declaration of Conformity.....</b>	<b>38</b>
<b>J2180A Declaration of Conformity .....</b>	<b>39</b>

## Chapter 1 - Overview

### Welcome

Thank you for purchasing one or more of Picotest's Signal Injectors.

Regulator and SMPS applications today are much more demanding than ever. Today's designs require increases in switching frequency and bandwidth, higher efficiency and lower standby current. A high resolution, high fidelity test setup is more critical than ever to getting the accurate measurements you need.

Picotest Signal Injectors are designed to greatly improve the accuracy of your test results.

#### Summary of Benefits:

- More accurate voltage regulator and power supply measurements
- Ability to your test systems' stability and step load non-invasively
- Ability to your test systems' stability in the production circuit configuration
- Ability to make high fidelity PSRR measurements
- Ability to test output impedance
- Ability to bias components under test
- Greatly reduce distortion in Bode and impedance measurements
- Improve RSA, SA and MDO measurements related to noise and EMI

### What's Included

Your Picotest Signal Injector set includes one or more of the following:

- **J2100A** Injection Transformer (1Hz-5MHz) – Stability
- **J2101A** Injection Transformer (10Hz-45MHz) – Stability
- **J2110A** Solid State “Bode Box” voltage injector \* – Stability
- **J2111A** Solid State current injector \* – Non-invasive stability, impedance, and step load
- **J2112A** Solid State high current injector \* – Non-invasive stability, impedance, and step load measurements
- **J2120A** Line Injector - PSRR, Ripple Rejection and Conducted Susceptibility
- **J2130A** DC Bias Injector – Component biasing
- **J2140A** Attenuators – Stability, noise
- **J2150A** Calibrator
- **J2160A** Splitter
- **J2170A** High PSRR adapter (used to power the J2110A, J2111A, J2112A, J2180A, J2190A)

- **J2180A** 0.1Hz – 100MHz Ultra Low Noise Preamp \* - Noise, EMI
- **J2190A** 0.1Hz – 10Hz Active Filter \* - Noise, EMI
- **VRTS-01** Voltage Regulator Test Standard kit\*

\* Note: the J2170A low noise, high PSRR power adapter, is used to power the J2110A, J2180A, J2190A, J2111A or the J2112A. The J2170A is included if you purchase any one of the aforementioned injectors. No other power adapter should be used with these injectors. The other adapters not listed do not require external power. One J2170A is included with each Signal Injector Bundle (set of Signal Injectors). One J2170A will be included with each injector requiring external power if the injector is purchased individually.

## ***Documentation and Support***

This documentation details the use of various Signal Injectors. Specifications for the individual injectors are also included.

The support section of Picotest's web contains additional documentation and various publications on testing power supplies regulators and other equipments in the Picotest Signal Injector Set.

## ***Warranty***

Every Picotest product you buy from Picotest is warranted against defects in material and manufacturing for a period of one year from the date of shipment. During the warranty period, PICOTEST is responsible for necessary repairs as long as the product can be proved to be defective.

For warranty service or repair this product must be returned to a service facility designated by PICOTEST. Please contact your local service representative for further assistance.

## ***Calibration***

The Signal Injectors do not require calibration.

## ***Safety Information***

To avoid possible electric shock or personal injury, please read and follow these guidelines carefully:

- Follow the guidelines in this manual and **DO NOT** use the Signal Injector if the case is damaged. Check the Injector case and terminals, and make sure all the devices are in

the proper positions.

- Do not apply excessive voltage to the Injector. Apply voltage within the rated range only.
- Use caution when measuring voltages above 30 V RMS, 42 V peak, or 60 V DC. These voltages pose an electric shock hazard.
- If you need to open the Signal Injector case or replace any parts, read the instruction in this manual first. You must be a qualified personnel to perform this action.
- Do not try to operate the Signal Injector if it is damaged. Disconnect the power from the equipment and consult the local service representative. Return the product to PICOTEST service department if necessary.

### ***Symbols and Terms***



This symbol indicates hazards that may cause damages to the Injector or even result in personal injury.



This symbol indicates high voltage may be present. Use extra caution before taking any action.



This symbol indicates earth (ground) terminal.



This symbol indicates this product complies with the essential requirements or the applicable European laws or directives with respect to safety, health, environment and consumer protections.



The crossed out "wheeie bin" symbol means the product must not be placed in the trash, but must be recycled as electronic waste according to the European Union directive:2002/96/EC.

---

## Chapter 2 – Introduction to Signal Injectors

### *Introduction*

Signal Injectors, also known as test adapters or interface adapters, are used to inject or transmit signals into and from various circuits so that the circuit's characteristics can be tested. Tests include Bode plot control loop analysis, circuit and component impedance measurements and conducted susceptibility measurements, to name just a few.

The network analyzer, sometimes referred to as a Frequency Response Analyzer (“FRA”) or Vector Network Analyzer (“VNA”), is a common piece of equipment in most electronics labs. Analyzers are used for a variety of tasks including stability analysis, component characterization and of course frequency response measurements. They can vary in features, but regardless of the analyzer being used, the analyzer oscillator signal must be injected into the circuit being tested in order for a measurement to be made.

The quality of the test signal injector, or test adapter, and the injection method can have a direct impact on the test results. For example, it is often the case that we see hobby store transformers used to inject signals into the loops of power supplies. In this case, the results are likely to be distorted due to the poor frequency response and impedance matching of the transformer.

It is critical that you understand the bandwidth limitations and the impedance of the test interface adapter, as well as, the impact of the injection signal magnitude on the measurement if you want to get accurate and repeatable test results.


Different injectors are used for different tests. In some cases, more than one injector will support various aspects of the test. The details can be found in the following sections.

The Picotest Injectors may be used with any network analyzer including those from OMICRON Lab, Agilent, Venable, Ridley and others. Please refer to the connection diagrams, shown with each injector, to see how each is interconnected with your test equipment.

### ***Injection Transformers – J2100A & J21101A***

The injection transformer is by far the prevalent method for connecting the network analyzer to a circuit being tested for loop stability (Figure 1). The goal of the transformer is to inject a signal into the control loop being measured, without impacting the performance of the loop. In order to accomplish this to a reasonable degree, it is important to pick an injection point that is unaffected by the terminating impedance of the transformer, which is often in the range

of 5 to 50 Ohms.

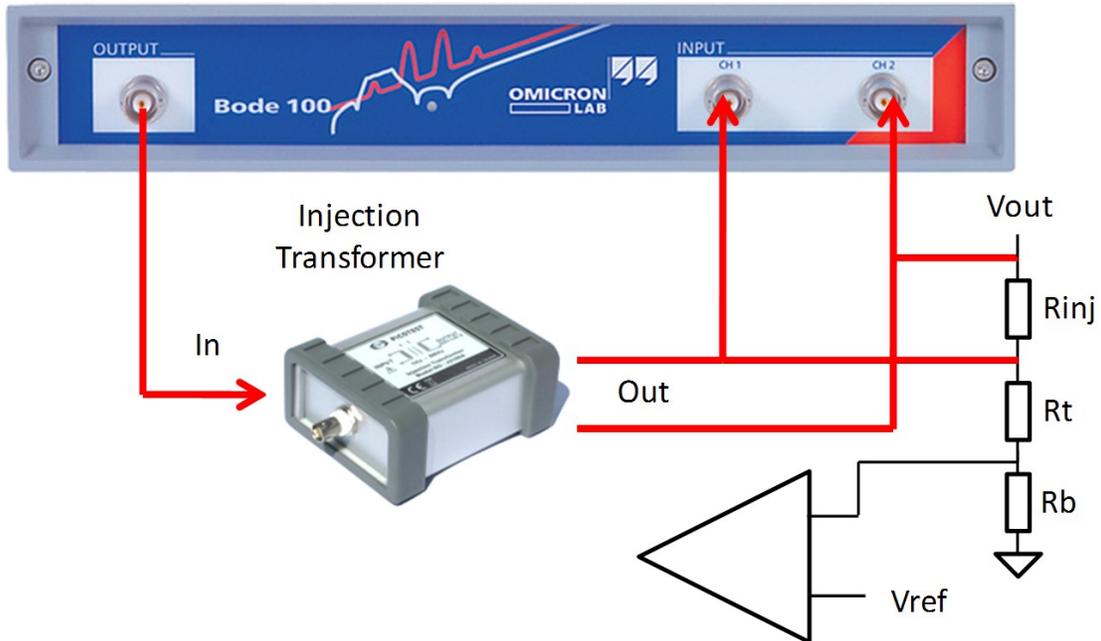


**Figure 1: Sample setup for the injection transformer (J2100A or J2101A) used to perform stability measurements.**

The transformer itself is outside of the measurement, leading many to incorrectly believe that the transformer is a non-critical element. The frequency range of the injection signal is dependent on the circuit being measured. The measurement of a typical Power Factor Corrector (PFC) control loop generally requires a measurement frequency of 1Hz or lower, as it is common for a PFC to have a control loop bandwidth of less than several Hz. The bandwidth of a high performance linear regulator can be as high as several MHz. While several different transformers can be used to address this range, it is beneficial to use a single transformer or two transformers covering different frequency bands at most, due to the high cost of the transformers.

The design of a transformer that has significant permeability at 1Hz and minimal attenuation at 10MHz or more is difficult to achieve. The core materials are quite expensive and the transformers generally must be hand wound. These issues, combined with the relatively small market volume size dictate the cost. Engineers often use audio transformers or hum eliminators as signal injection transformers. The result is that the incorrect results are invariably produced from the use of these poor injection transformers.

## Solid State Voltage Injector – J2110A

While it is possible to obtain high quality injection transformers with bandwidths as wide as 1Hz to 5MHz or more, in some cases this is still insufficient for the testing of some circuits. For example, a typical heater control loop might have a bandwidth of less than 1Hz while some linear regulators and opamp circuits can have bandwidths of up to 100MHz or greater. For these applications, a solid state injector can provide the necessary bandwidth. The solid-state injector is often called a “Bode Box.” A solid state injector can perform at DC, while the upper frequency limit is dictated by the components selected and the printed circuit board material and layout. It is possible to obtain a solid state injector with a working range of DC – 200MHz, though above 50MHz the interconnection between the injector and the circuit being tested can become quite critical. It is essential that ripple from the injector’s power supply does not dramatically degrade the dynamic range or the signal to noise ratio of the measurement. Bode and other plots are often much cleaner when using a solid state injector than compared with those made with an injection transformer.

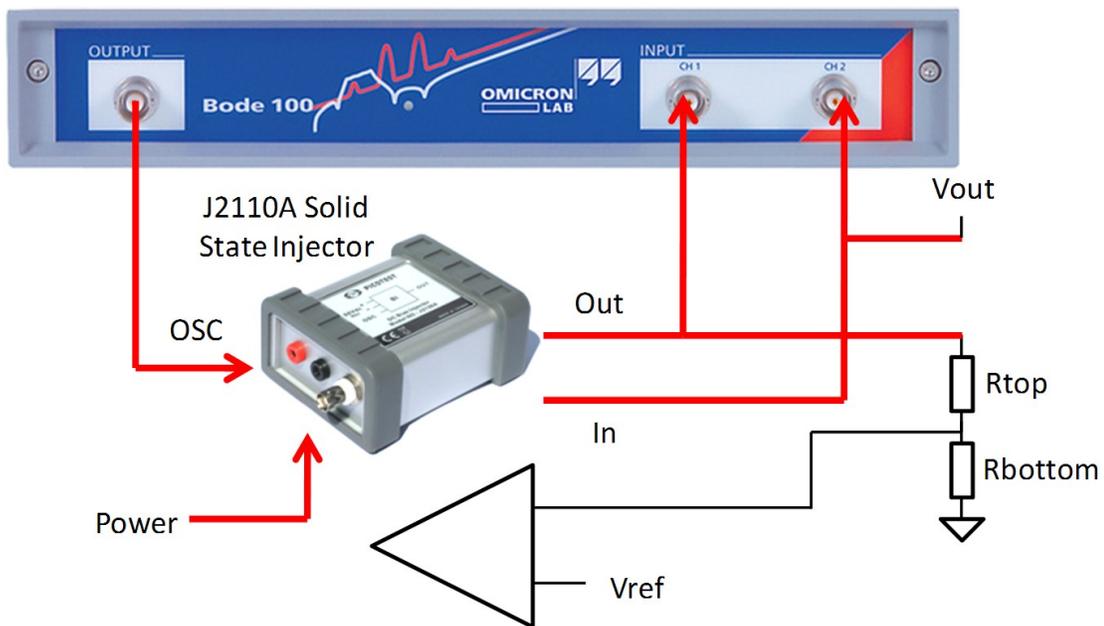

**Figure 2: Sample setup for the solid state injector “Bode Box” (J2110A) used to perform stability measurements.**

The selection of a valid injection point in the circuit is more critical when using a solid state injector than with the injection transformer. The solid state injector presents an infinite impedance between the points of injection. In order to provide correct results one side of the measurement must present a much higher impedance than the other side. In a typical power supply control loop, the voltage sense divider is generally a good injection point, since the output impedance of the power supply is very low compared with the impedance of the


voltage sense divider.

The solid state injector is sometimes limited by its operating voltage, in this case  $\pm 12V$ . This is not the amplitude of the injection signal, but the DC operating voltage of the output that the injector is connected to. However, most applications requiring a solid state injector fall within these operational limits.

### **Solid State Current Injectors – J2111A & J2112A**

The current injector is possibly the most versatile of the Signal Injectors. While it is not designed to replace an electronic load, it is capable of performing a transient small-signal step loading at switching speeds and bandwidths that electronic loads cannot match. Also, the capacitance of an electronic load is generally too high and impacts the measurement where the J2111A and J2112A are minimally invasive.

Incorporating a 40MHz current monitor, the current injector can also be used to measure output impedance, as well as, the stability of a filter, combined with the negative resistance of a switching converter or power supply. An added benefit is that using a current injector, these measurements can all be made using the full system loading since the injector is connected in parallel with the actual load.

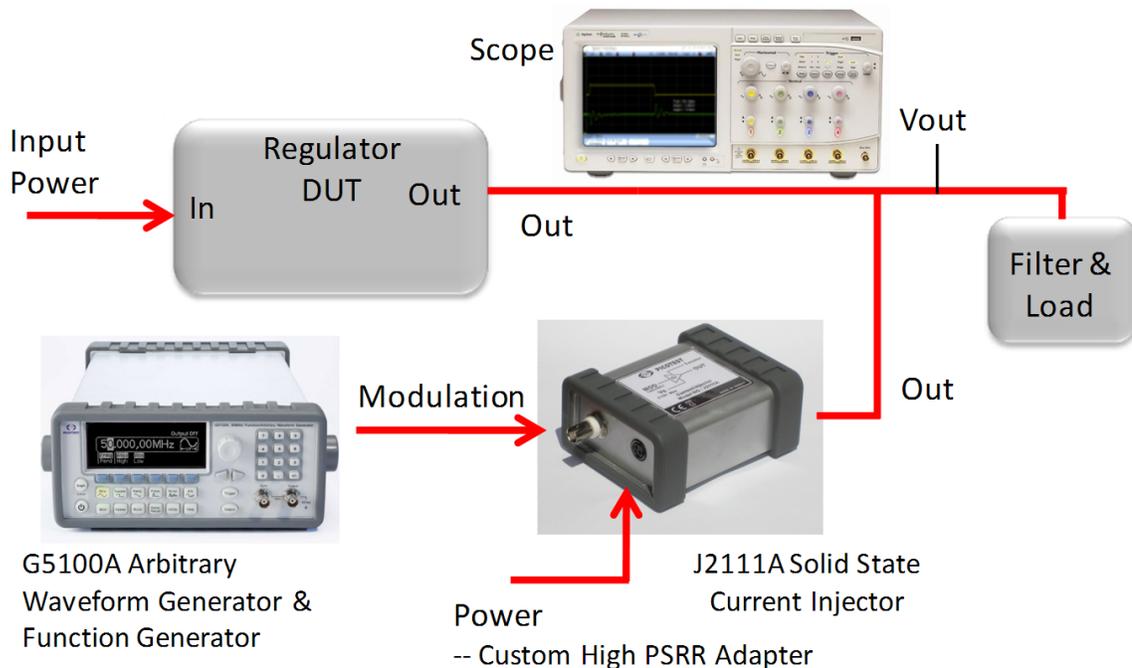

**Figure 3: Sample setup for the Solid State Current Injector (J2111A) used to perform a non-invasive load transient measurement.**

The J2111A current injector is a bilateral device, which works with positive or negative voltages and includes an internal bias for use with a network analyzer. The bias can be disconnected for use with an external waveform or arbitrary waveform generator such as the Picotest G5100A.

The current injector is basically a voltage to current converter with a gain of 10mA/V. Put in a 1V signal into the modulation port and you get 10mA out of the output port and 10mV out of the current monitor port. The current injector can be controlled by the output of the network analyzer (for frequency domain sweeps) or a function generator or arbitrary waveform generator (for time domain control and load profiling).

The J2111A current injector is capable of sinking 100mA while the J2112A can sink up to 1A. The J2112A is not bilateral and can only operate from positive voltages while the J2111A can sink current from either positive or negative voltages.

### ***Line Injector – J2120A***

While the injection transformer is a very wideband adapter, it is not useful for measuring ripple rejection (PSRR) of a power supply or even an opamp. This is because the attributes that make the injection transformer perform so well also result in a transformer that is absolutely intolerant of DC current. Even very small DC currents (5mA or less) can greatly reduce the signal capacity or even totally saturate the transformer. For this reason, the line injector is another essential test adapter.

It allows a test signal to modulate the line or buss voltage. Like the current injector, the line injector can be controlled by a network analyzer's oscillator output or a time domain signal.

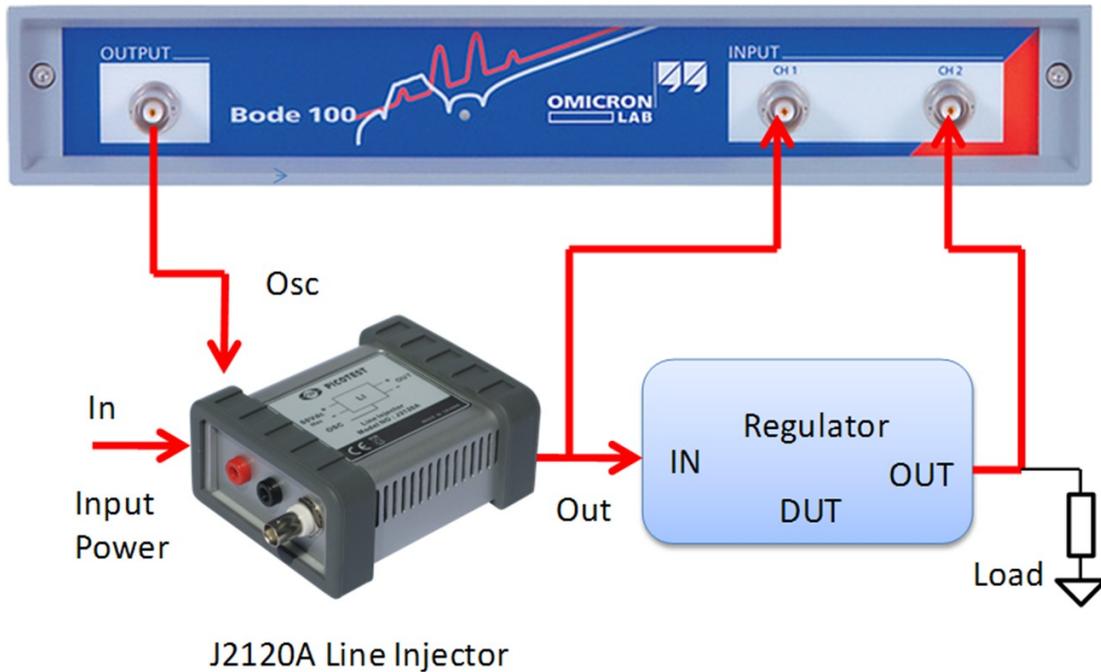


Figure 4: Sample setup for the Line Injector (J2120A) used to perform a PSRR measurement.

### ***Bias Injector – J2130A***

When using the network analyzer to measure impedance, such as the capacitance and ESR or a capacitor, or the DCR of an inductor, etc., it is often necessary to provide a voltage bias to the device being tested. This is true of semiconductor junction capacitances, varactors, and some ceramic capacitors (especially X5R). In these cases the impedance is a function of the DC bias on the device. The Picotest DC bias injector (J2130A) is used for this purpose during impedance measurements.

### ***Attenuators – J2140A***

There are two common uses for attenuators when used in conjunction with the network analyzer. One is to attenuate the oscillator source signal. While this may seem odd, one of the most common errors in analyzer measurements is using a source signal that is too large. Even though the analyzer allows setting of the signal output amplitude, the lowest setting is often too high to allow an accurate small-signal measurement to be made. The correct amplitude is the smallest amplitude that exceeds the noise floor.

Attenuators are also useful for improving the dynamic range of the measurement. In some cases, as in measuring the open loop gain of an opamp as one example, the low frequency loop gain will be extremely large (100dB or more is not uncommon). Attenuating the output signal increases the effective range of the measurement.

### ***Preamplifier – J2180A***

The J2180A low noise preamplifier provides a fixed, AC coupled 20dB gain while converting a 1 MegOhm input impedance to a 50 Ohm output impedance. With a 3dB bandwidth of 0.1Hz to 100MHz, the preamplifier improves the sensitivity of oscilloscopes, network analyzers and spectrum analyzers while reducing the effective noise floor and spurious response. The preamplifier can also serve as a low frequency DC blocker for a spectrum analyzer or you can use it to connect a high input impedance oscilloscope probe to 50 Ohm equipment.

The J2180A preamplifier offers very low noise, fast 100V/uS slew rate for pulse applications and very low distortion for audio applications.

### ***Active Filter – J2190A***

The J2190A active filter presents a high impedance (approximately 150kOhms) minimizing the loading of the circuit being tested. The output impedance is 50 Ohms allowing low noise coaxial connections to all typical test equipment. The 0.1Hz-10Hz noise band is common for opamp measurements, voltage regulators and voltage references.

The J2190A is a 4th order high pass and 4th order low pass filter with an optimally flat response and 0dB gain. Additional filters can be cascaded for even sharper cutoff.

The J2190A is not a programmable filter, though it is easily customizable to a particular noise bandwidth and/or circuit gain.

## Chapter 3 - Signal Injectors: Measurements and Specifications

### ***J2100A/J2101A Injection Transformers***

One of the most common tests performed by a network analyzer is the control loop stability measurement, or Bode plot. The injection transformer is the most prevalent method for connecting a network analyzer to the circuit in order to perform the stability measurements.

There are two different injection transformers, each with different overall bandwidths to support various types of applications.

#### **Main Features**

##### **J2100A          1Hz-5MHz Transformer**

- 1Hz supports PFC regulators
- 5MHz high enough for most power supplies and regulators
- 23 Octave range
- Low distortion for superior precision
- 5 Ohm termination for minimum impact to loop
- Includes attenuation to assure small signal measurement

##### **J2101A          10Hz-45MHz Transformer**

- 10Hz supports off-line power supplies
- 45MHz high enough for even state of the art regulators
- 23 Octave range
- Low distortion for superior precision
- 5 Ohm termination for minimum impact to loop
- Includes attenuation to assure small signal measurement

#### **Description**

The goal of the transformer is to inject a signal into the control loop being measured, *without impacting the performance of the loop*. The test is performed by inserting an oscillator signal into the control loop, allowing an OPEN LOOP measurement in a CLOSED LOOP system. The analyzer sweeps the frequency while measuring the voltage at each side of the transformer. One side of the transformer is the input signal while the other side is the output signal. The division of the two results in the loop gain and loop phase, or bode response. The transformer is isolated and, therefore, capable of floating on a high voltage, such as in a Power Factor Corrector (PFC) circuit, which is often close to 400VDC.

The usable bandwidth of an injection transformer is generally significantly greater than its 3dB frequency limits. This is because the transformer itself is outside of the measurement, leading

many to incorrectly believe that the transformer is a non-critical element.

The bandwidth of the transformer is strongly related to the terminating impedance (i.e. the impedance of the instrument). The source impedance of the oscillator in the Omicron Bode-100, and most other network analyzers, is 50 Ohms. Assuming this impedance, the recommended termination resistor is 5 Ohms. This significantly attenuates the injection signal, which is generally beneficial, as a common error in Bode measurements is using a signal which is too large, and therefore, resulting in a measurement that is not a “small signal” measurement. This low value termination resistance also improves the low frequency bandwidth of the transformer.

An added benefit of this low value is that it can generally be left in the circuit at all times, simplifying the connection to the network analyzer without appreciably impacting the output voltage of the circuit being tested.

Today’s power systems demand better measurements at both higher and lower frequencies. Engineers often use audio transformers or video transformers for signal injection purposes. This is unwise, as the low frequency performance of a video transformer is generally quite poor while both the low and high frequency performance of the audio transformer are quite poor. Many of the transformers sold as injection transformers use ferrite core materials, which are good for high frequency but relatively poor for high frequency.

The design of a transformer that has sufficient permeability at 1Hz and minimal attenuation at 10MHz or more is difficult to achieve. The core materials are specially processed and the transformers generally must be hand wound.


Most other injection transformer manufacturers use an inexpensive ferrite transformer; the price is not indicative of the cost of the transformer. The Picotest injection transformers are made of a specially annealed amorphous material in order to obtain nearly infinite permeability (>100,000). The difference in the measurement results between a Picotest transformer and another variety of transformer depends on the circuit. A switch-mode power supply is less demanding, while an opamp or a 3 terminal regulator is more demanding. In particular, the LM317 style regulator requires the measurement to be referenced to Vout and not ground. In this case the transformer parasitics are much more evident.

The Picotest injection transformers are capable of an impressive 23 Octave bandwidth. This bandwidth is still not sufficient to support all requirements, and so two transformers have been designed. One is optimized for performance from 1Hz to 10MHz while the other is optimized for 10Hz to 40MHz.

Either transformer is usable for most applications. The lower frequency transformer is usable for PFC measurements, where the bandwidth is generally below 10Hz while the higher frequency transformer is usable for the newest switch-mode converters and LDO’s which have bandwidths up to several MHz.

While the injection transformer is a very wideband adapter, it is not useful for measuring ripple rejection (PSRR) of a power supply or even an opamp. This is because the attributes that make the injection transformer perform so well also result in a transformer that is intolerant of DC current. Even very small DC currents (5mA or less) can greatly reduce the signal capacity or even totally saturate the transformer.


### Connecting the Injection Transformer: Stability

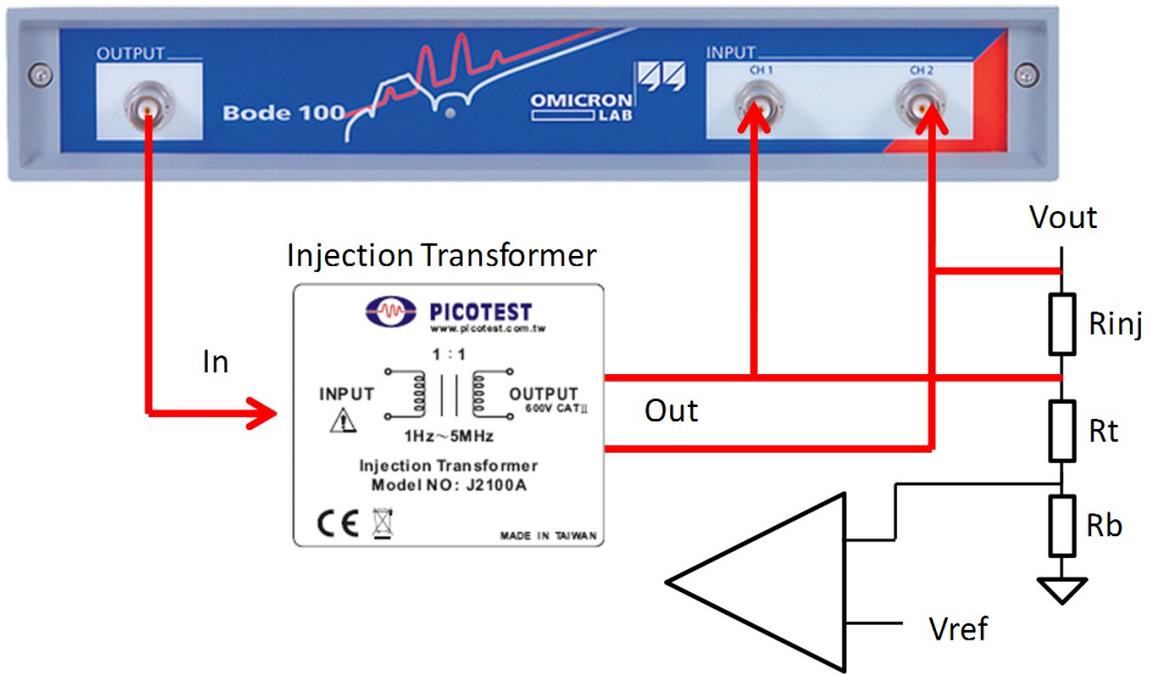

**Figure 5: Injection Transformer Connections for stability measurements.**

The injection transformer is connected as shown above. The output oscillator of the Bode analyzer is connected via a BNC connector to the input of the transformer. The output of the transformer is connected across the “in-circuit” injection resistor ( $R_{inj}$ ). This allows the analyzer oscillator to stimulate the loop while the loop response is recorded.

### Technical Specifications: J2100A



Characteristic	Rating	Conditions
Ratio	1:1	
Termination Impedance	5 Ohms	
Nominal 3dB Bandwidth	10Hz - 5MHz	10mHz~100Hz, 10Hz~100MHz
Isolation Voltage	600V CATII	3kVrms/1min
Isolation Capacitance	150pF	1kHz
DC current	10mA	DC current at which inductance(@1kHz) drops 10% (typ) from its value without current
Temperature range	0-50°C	inductance(@1kHz) / 0,50 °C
Maximum Altitude	6000 Ft	

\* Performance at -10dBm input level

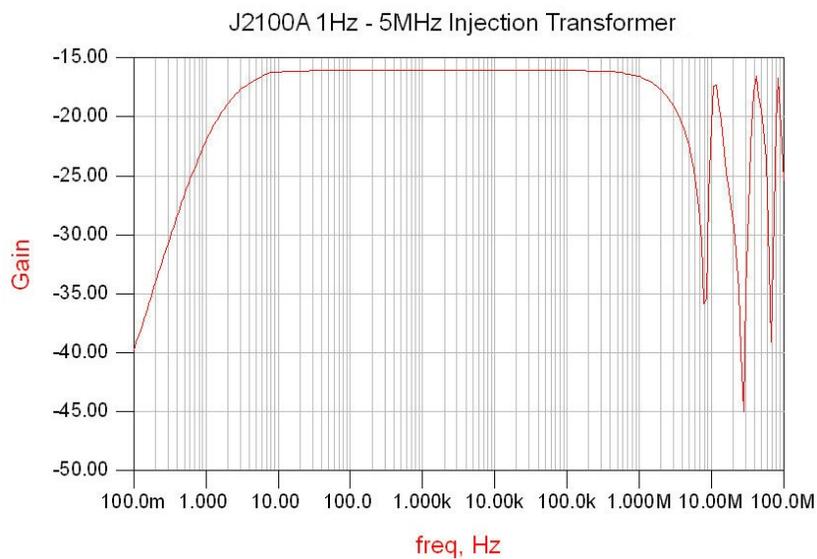


Figure 6: Frequency Response for J2100A injection transformer.

### Technical Specifications: J2101A

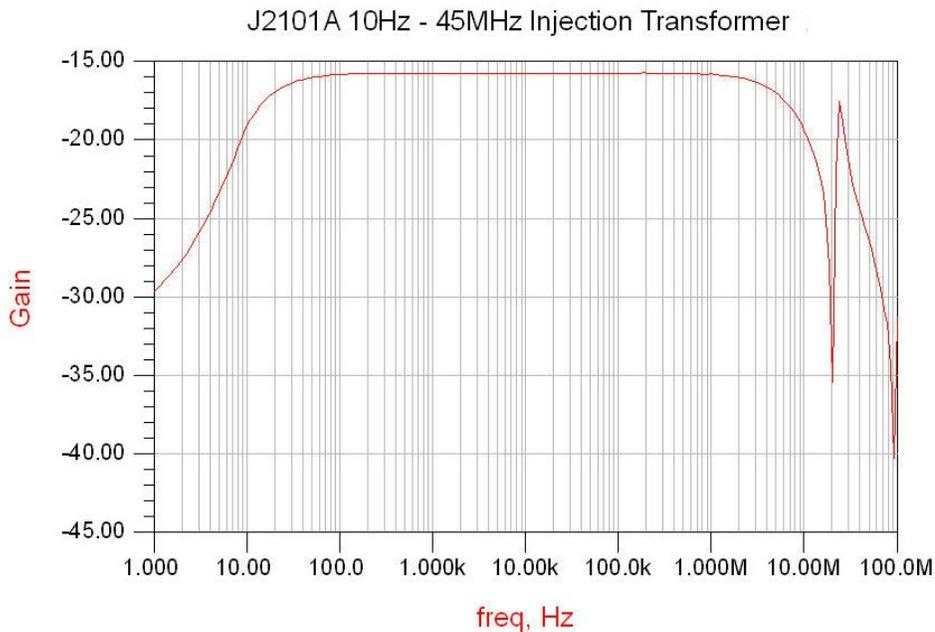



Figure 7: Frequency Response for J2101A injection transformer.

Characteristic	Rating	Conditions
Ratio	1:1	
Termination Impedance	5 Ohms	
Nominal 3dB Bandwidth	10Hz - 5MHz	100mHz~100Hz, 10Hz~500MHz
Isolation Voltage	600V CATII	3kVrms/1min
Isolation Capacitance	150pF	1kHz
DC current	10mA	DC current at which inductance(@1kHz) drops 10% (typ) from its value without current
Temperature range	0-50°C	inductance(@1kHz) / 0,50 °C
Maximum Altitude	6000 Ft	

## ***J2110A Solid State Voltage Injector***

### **Main Features**

#### **J2110A Solid State Bode Box Voltage Injector**

- DC-45MHz; supports thermal and mechanical controls and highest performance regulators
- Low distortion for superior precision
- 25 Ohm insertion resistance
- 50 Ohm oscillator input
- < 3uA typical bias current
- >2 M $\Omega$  typical Input Resistance
- Includes J2170A High PSRR Low Noise Regulator with Universal input

### **Description**

The solid state voltage injector, or “Bode box”, is employed in the same way as the injection transformer. As noted in the introduction section, the J2110A injector has a wider bandwidth. However, the selection of a point in the circuit to insert the injection connection can be more challenging. In order to provide correct results one side of the measurement must present much higher impedance than the other side. A rule of thumb is that one side should have an impedance that is at least 50 to 100 times greater than the other. In a typical power supply control loop, the voltage sense divider is generally a good injection point, since the output impedance of the power supply is very low compared with the impedance of the voltage sense divider.

### **Connecting the Solid State Injector: : Stability**

The solid state injector is connected in much the same way as the injection transformer. The exception, as noted above, is that the impedance on the Vout side must be different from the Rtop side.

No injection resistor is used.


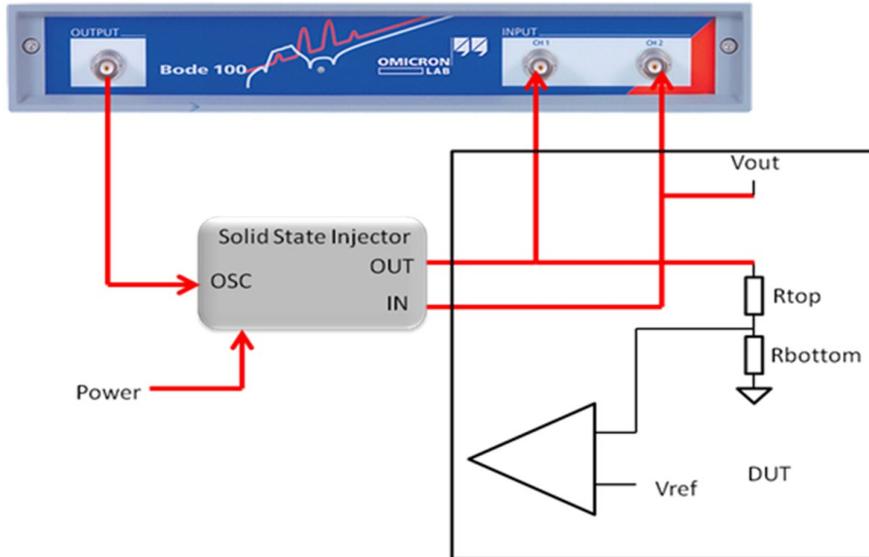


Figure 8: Solid State Injector Connections for stability measurements.

### Technical Specifications



Characteristic	Rating	Conditions
Max $V_s$	+/-12V	25 degC
Max $I_{cc}$	20mA	
Max input voltage DC+AC	+/-10.5V	
Output Voltage	+/-10.5V	
Offset Voltage	3mV	
-3dB Bandwidth (-10dBm)	DC-40MHz	
Temperature range	0-50°C	0,50 degC -3dB BW
Maximum Altitude	6000 Ft	

## J2120A Line Injector

### Main Features

#### J2120A Line Injector

- 10Hz-10MHz usable bandwidth
- Low loss design
- 5 Amps maximum current
- 50VDC max input
- Easily measure input filters and PSRR

### Description

The line injector allows the input DC supply voltage to be modulated by the network analyzer source signal, as in the case of a PSRR measurement. The line injector must be capable of a frequency range well below the AC line frequency and at least above the control loop bandwidth of the circuit being tested.

### Connecting the Line Injector: PSRR

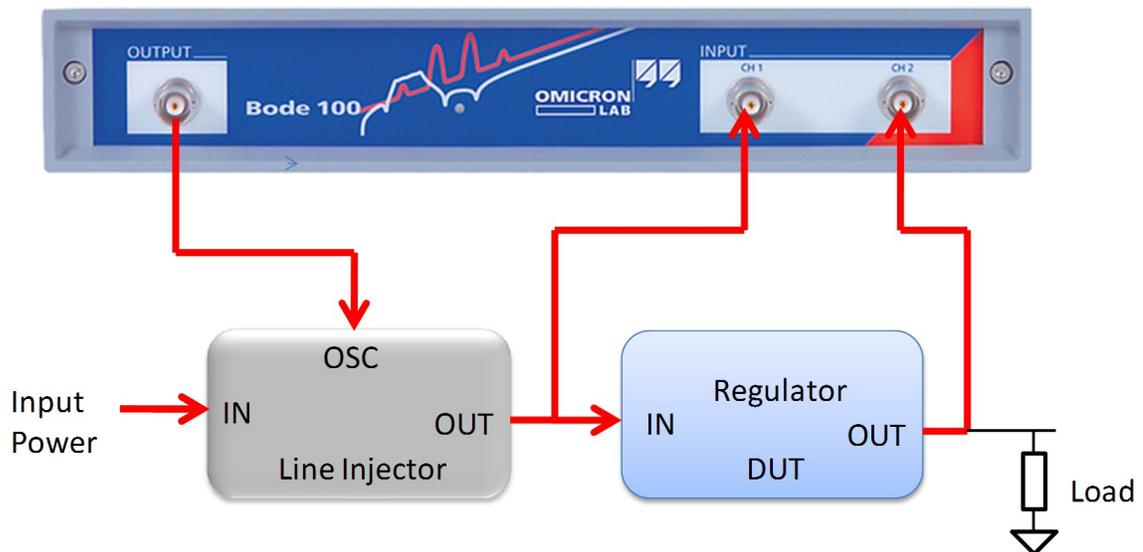


Figure 9: Line Injector Connections for PSRR measurements.

The line injector is only capable of sourcing current, so that the output amplitude can be significantly impacted by the operating current and the total storage capacitance at the load. The Bode-100 network analyzer has a very high selectivity so distortion at the output of the line injector generally does not influence the measurement. Again, this is a small signal injector, so the oscillator signals should be kept as small as possible above the noise floor. As a guide, try to keep the input signal amplitude below 50mVpp (-20dBm). In some cases we want to

attenuate the source signal even further, and so we have included the attenuators in the injector kits. Some analyzers, such as the Omicron-Lab Bode-100 allow shaping the injection amplitude as a function of frequency, which helps optimize the signal level.

### Measuring Input Impedance

The line injector can also be used in conjunction with a current probe to measure the input impedance of a power supply. The input impedance of a switching power supply or regulator is negative, which is a stability concern when combined with an EMI filter, making the measurement an important part of the design, analysis and verification process. The current probe must be set for 1A/V or the results need to be scaled accordingly for different settings.

### Connecting the Line Injector: Input Impedance


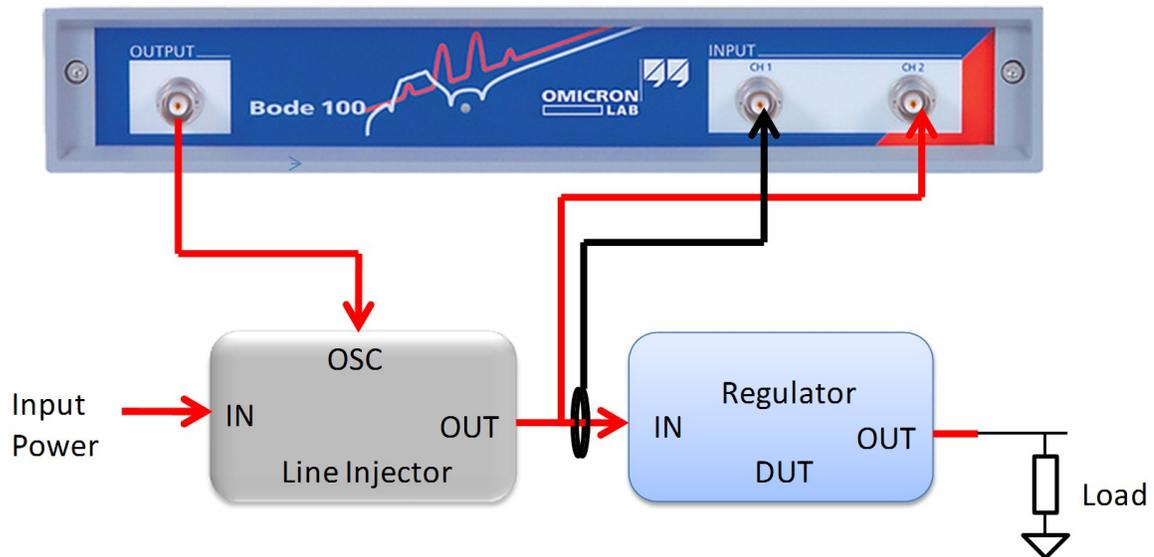


Figure 10: Line Injector Connections for input impedance measurements.

## Technical Specifications



Characteristic	Rating	Conditions
Maximum DC Input Voltage	50V	
Maximum Continuous Current	5A	
Maximum Voltage Drop	3.25V	At 5A
3dB Frequency Response	15Hz-5MHz	Vin=5V RL=50 Ohms
Useable frequency response	10Hz-10MHz	
Recommended injection signal	-20dBm-10dBm	
Temperature range	0-50°C	
Maximum Altitude	6000 Ft	

## J2130A DC Bias Injector

### Main Features

#### J2130A Bias Injector

- 10Hz-10MHz usable bandwidth Low loss design
- Easily measure varactors, junction capacitance
- Measure X5R capacitor voltage sensitivity
- Bias low power transistor amplifiers and diodes for parameter extraction

### Description

The Picotest DC bias injector (J2130A) is used for applying a DC voltage bias on components during impedance measurements.

Connecting the DC Bias Injector: Component Bias


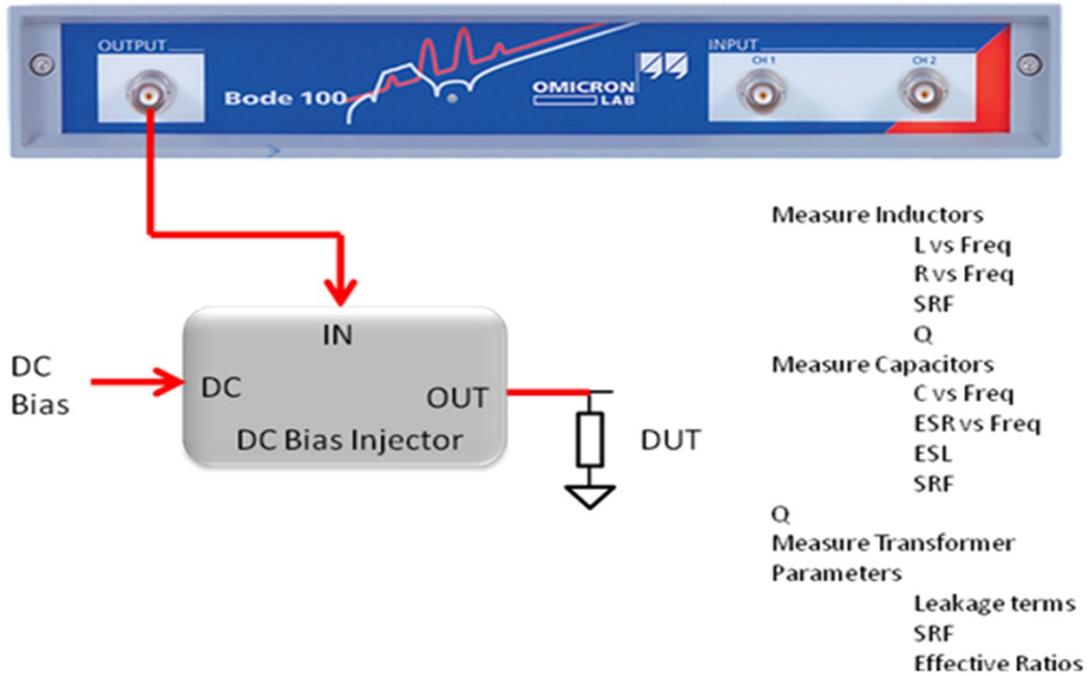


Figure 11: Connections for DC Bias Impedance measurements.

Technical Specifications



Characteristic	Rating	Conditions
Maximum DC Bias	50VDC	
Bias Resistance	10kOhms	
Maximum Bias Current	5mA	At 5mA
Frequency Response	15Hz-40MHz	Frequency sweep 10Hz~500MHz, power=-10dBm
Temperature range	0-50°C	
Maximum Altitude	6000 Ft	

## ***J2111A/J2112A Solid State Current Injector***

### **Main Features**

#### **J2111A & J2112A**

#### **Solid State Current Injector**

- High PSRR Low Noise Regulator with Universal input
- 20nSec typical rise and fall time
- DC-40MHz usable range (interconnection dependent)
- Two Quadrant Bipolar operation works with positive or negative source
- Build in offset for use with Network Analyzer
- Precision current monitor with 50 Ohm output
- Works with AWG, Function generator and network analyzer
- Measures Non-invasive phase margin, Output impedance, reverse transfer, crosstalk, input filter stability
- Fast transient load stepping (up to 100mA with the J2111A and 1A with the J2112A)

### **Description**

The current injector is one of the most versatile of the injector products. Coupled with the G5100A, or other equivalent function generator, it is capable of performing small signal load steps up to 40MHz, with very fast rising and falling edges. Using the G5100A, also allows the rise and fall times to be controlled, various waveforms or even arbitrary waveforms. This can be used to simulate the effects of many different types of loads, including high speed digital circuit loading, which is often largely dynamic.

The current injector can also be used to measure output impedance of power supplies, voltage regulators, power buses and even batteries. It can be used to non-invasively measure the stability of a combined input filter and the negative resistance of a switching power supply. It also has application in the measurement and extraction of transistor data, including small signal current gain, Ft and many other dynamic performance parameters.

In RF and instrumentation circuits it can be used to provide constant current biasing for class A amplifiers and buffers.

The current injector has two connections for the output, Output and GND. The input is DC+AC and can be connected to either a signal generator or a network analyzer. A built in bias current enables Class A operation for use with a network analyzer. The Current Injector and DC Bias injector can also be used for this purpose.

The output current is reduced 40dB from the input signal, resulting in 10mA/V scaling. The current monitor is designed to be terminated into 50 Ohms and can be used with the network analyzer, an oscilloscope or a DMM to monitor current. When used in conjunction with a voltage probe, the analyzer can measure Voltage/Current, which is the impedance.

### Connecting the Current Injector: Output Impedance

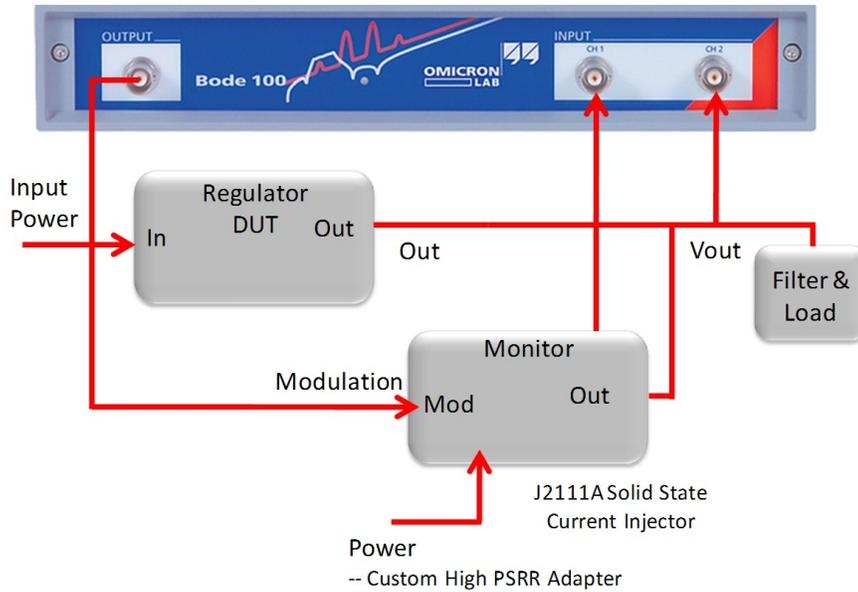


Figure 12: Current Injector Connections for output impedance measurements.

### Connecting the Current Injector: Reverse Transfer



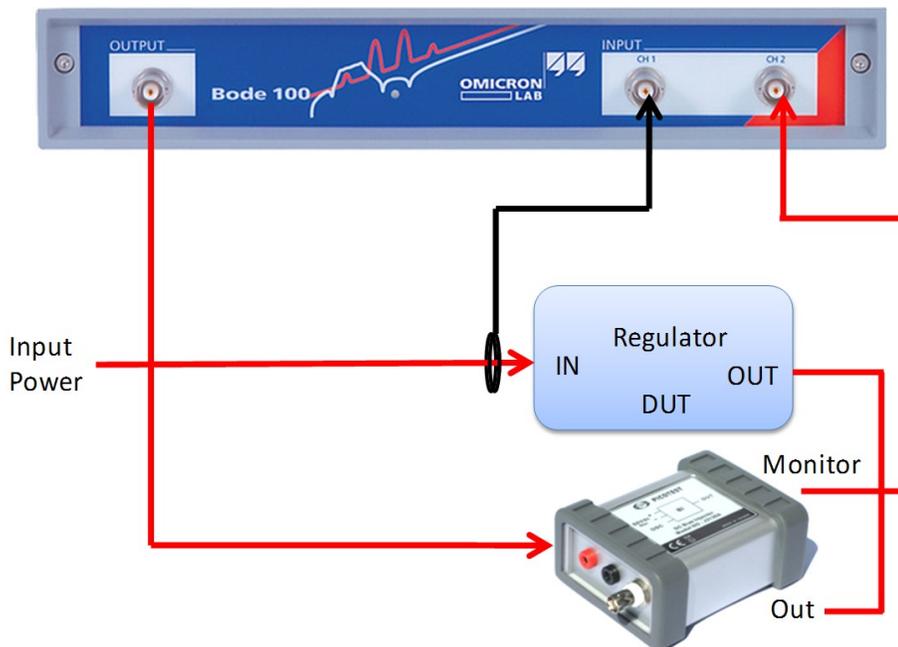


Figure 13: Current injector connections for reverse transfer measurements.

\*\*Both the J2111A and the J2112A are connected in circuit in the same fashion.

### Technical Specifications

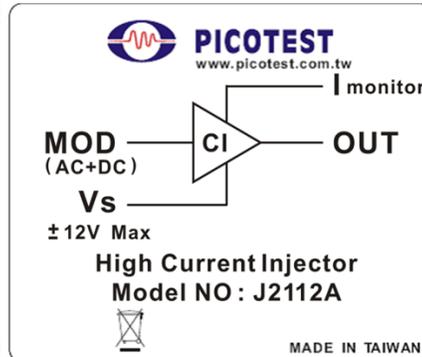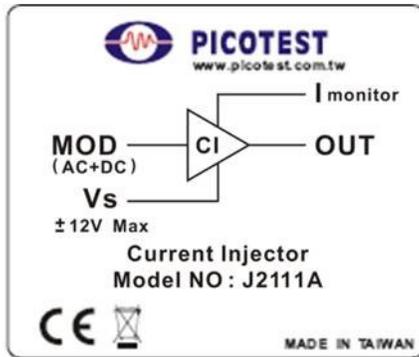

Characteristic	J2111A Rating	J2112A Rating
Max input voltage DC+AC	+/-5V	+5V
Maximum Output Current	+/-100mA	+1A
Minimum Output Current	0A	1mA
Output voltage	40V	10.5V
Current Monitor	1V/A	100mV/A
Modulator Gain	10mA/V	200mA/V
Offset Current (typical)	+/-24mA	+250mA
Usable Bandwidth	DC-40MHz	DC-40MHz
Temperature range	0-50°C	0-50°C
Maximum Altitude	6000 Ft	6000 Ft

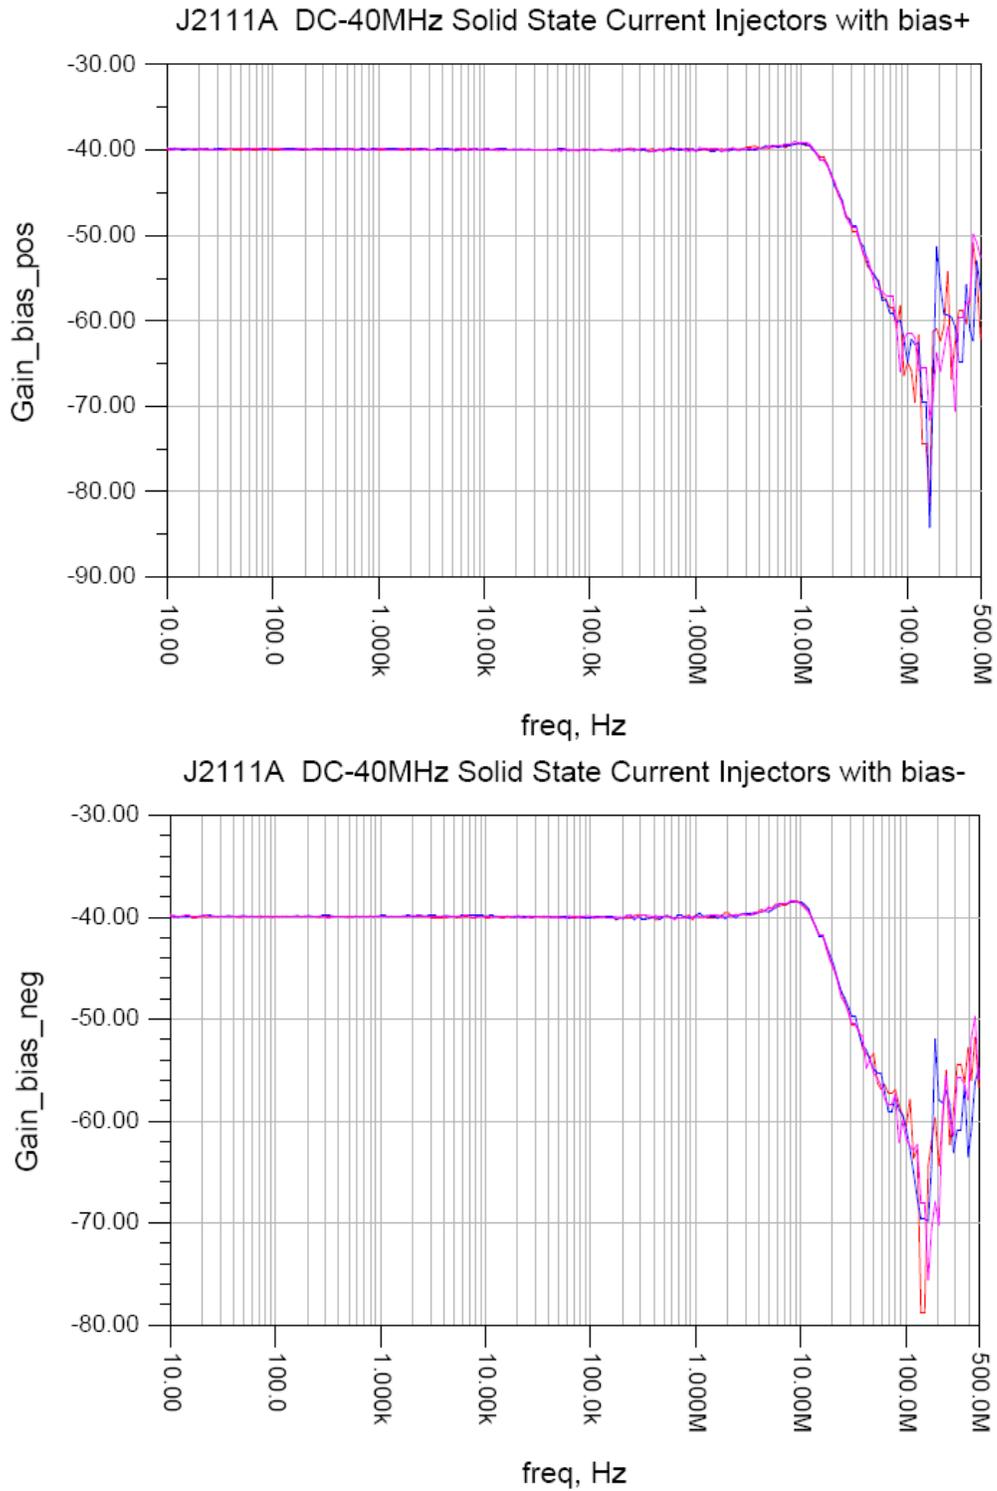


Figure 14: J2111A frequency response.

## ***J2170A High PSRR Power Supply Adapter***

### **Main Features**

#### **J2170A Power Supply for J2110A and J2111A**

- Universal input voltage 100V-240V
- +/-12V 40mA output
- Very low output impedance (see below)
- Very low noise (have not measured, nor do we have the capability to)
- Ultra high PSRR (see below)

### **Description**

The J2170A power adapter is specially designed for use with the Picotest J2110A, J2111A, J2112A, J2180A, J2190A signal injector products. The supply combines a universal worldwide input (100 to 240 VAC ) with two high performance linear regulators.

While there are many off-the-shelf power supplies available that can provide a universal input voltage and 12V output voltage, they do not provide the same performance as the J2170A. Most switching regulators produce significant ripple at and above 100kHz. This ripple passes through the PSRR of the internal opamps, reducing the noise floor. While this may work in many applications, it is less than ideal. Typical switching power supplies and even typical linear regulators have a high output impedance at 40MHz, due to the ESL of the output capacitors and the nature of the control loop.

The J2170A uses a discrete design approach, offering very low output impedance, stable performance with large ceramic decoupling capacitors and ultra high PSRR compared with typical off-the-shelf devices.

To maintain a good noise floor for various measurements, the power supply must have very low noise.

## ***J2140A Attenuators***

### **Main Features**

#### **J2140A Attenuator**


- Integrated unit includes 20dB, 40dB and 60dB
- Cascade for greater attenuation
- Improve noise floor or assure small signal measurement

## Description

There are two common uses for attenuators when used in conjunction with the network analyzer. One is to attenuate the oscillator source signal. While this may seem odd, one of the most common errors in analyzer measurements is using a source signal that is too large. Even though the analyzer allows setting of the signal output amplitude, the lowest setting is often too high to allow an accurate small-signal measurement to be made. The correct amplitude is the smallest amplitude that exceeds the noise floor.

Attenuators are also useful for improving the dynamic range of the measurement. In some cases, as in measuring the open loop gain of an opamp as one example, the low frequency loop gain will be extremely large (100dB or more is not uncommon). Attenuating the output signal increases the effective range of the measurement.

## Technical Specifications

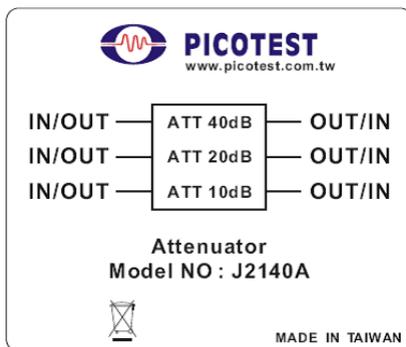

Characteristic	Rating
Maximum input level	+20dBm
3dB Frequency Range	DC-50MHz
Maximum VSWR	1.3
Attenuation accuracy	0.2 dB

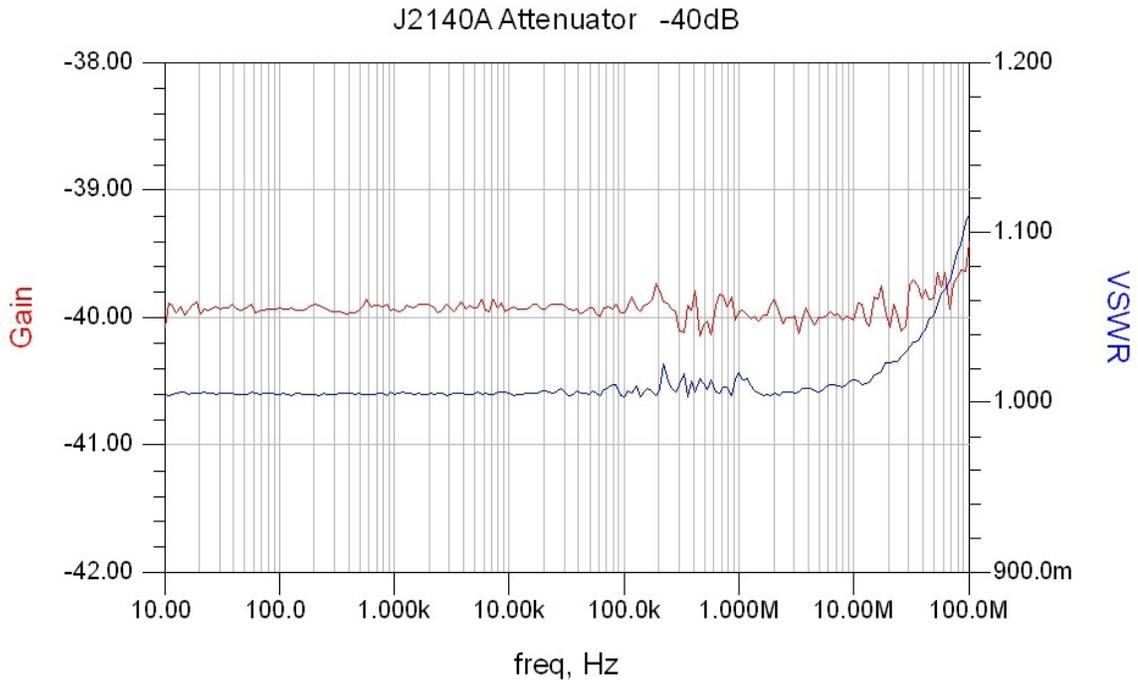


Figure 15: 40dB attenuator frequency response.

## ***J2180A 0.1Hz to 100MHz Ultra Low Noise Preamp***

### **Main Features**

#### **J2180A 0.1Hz to 100MHz Ultra Low Noise Preamp**

- Works with all oscilloscopes, spectrum analyzers and network analyzers
- Active DC bias loop maintains low DC output voltage
- High input impedance compatible with typical probes minimizes circuit loading
- Ultra low noise
- Works with near field probes for EMI troubleshooting
- Improves effective noise floor and spurious response
- Very wide bandwidth (0.1Hz – 100MHz)
- Compatible with J2170A power supply

### **Description**

The J2180A low noise preamplifier provides a fixed, AC coupled 20dB gain while converting a 1 MegOhm input impedance to a 50 Ohm output impedance. With a 3dB bandwidth of 0.1Hz to 100MHz, the preamplifier improves the sensitivity of oscilloscopes, network analyzers and spectrum analyzers while reducing the effective noise floor and spurious response. The

preamplifier can also serve as a low frequency DC blocker for a spectrum analyzer or you can use it to connect a high input impedance oscilloscope probe to 50 Ohm equipment.

The J2180A preamplifier offers very low noise, fast 100V/uS slew rate for pulse applications and very low distortion for audio applications.

### Connecting the Preamp: EMI and Noise Measurements


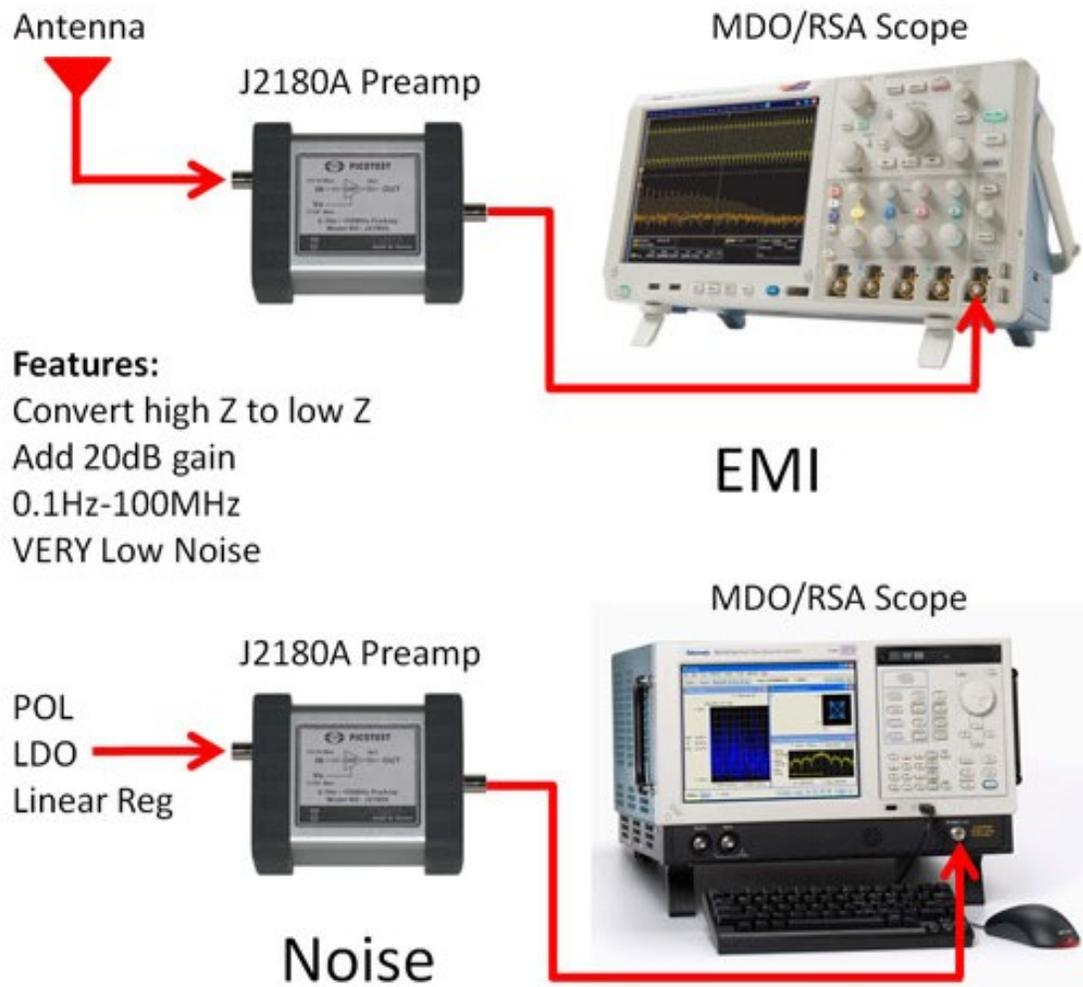


Figure 16: Sample setups for the J2180A Preamp used for noise and EMI measurements.

### Technical Specifications

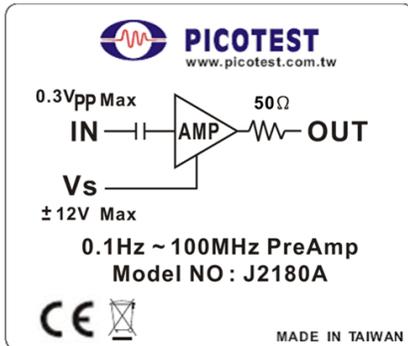

Characteristic	Rating
Max Vcc	+/-12V
Max Input Voltage	300mVpp
Output Voltage	3Vpp
Max Icc	20mA
Usable Bandwidth	0.1Hz-100MHz
Temperature range	0-50°C

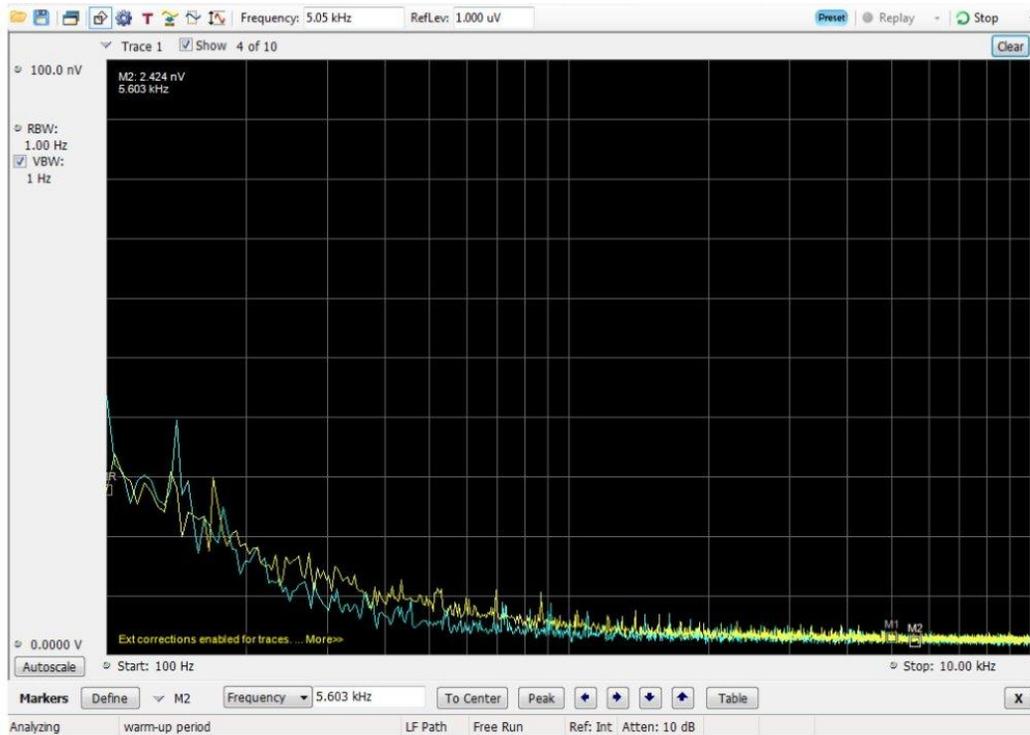


Figure 17: Noise Density 100nV full scale, mid range noise density is 2nV/Root-Hz.

## J2190A 0.1Hz to 10Hz Active Filter

### Main Features

#### J2190A 0.1Hz to 10Hz Active Filter

- 0.1Hz to 10Hz 4<sup>th</sup> Order Filter
- Ultra low noise
- Cascadable with additional filters
- Compatible with J2170A power supply

### Description

The J2190A active filter presents a high impedance (approximately 150kOhms) minimizing the loading of the circuit being tested. The output impedance is 50 Ohms allowing low noise coaxial connections to all typical test equipment. The 0.1Hz-10Hz noise band is common for opamp measurements, voltage regulators and voltage references. Many application notes offer schematics of such a filter for test purposes. An engineer's time is much too valuable to be spent building test equipment. We have created a 4th order high pass and 4th order low pass filter with an optimally flat response and 0dB gain. Additional filters can be cascaded for even sharper cutoff.

The J2190A is not a programmable filter, though it is easily customizable to a particular noise bandwidth and/or circuit gain.

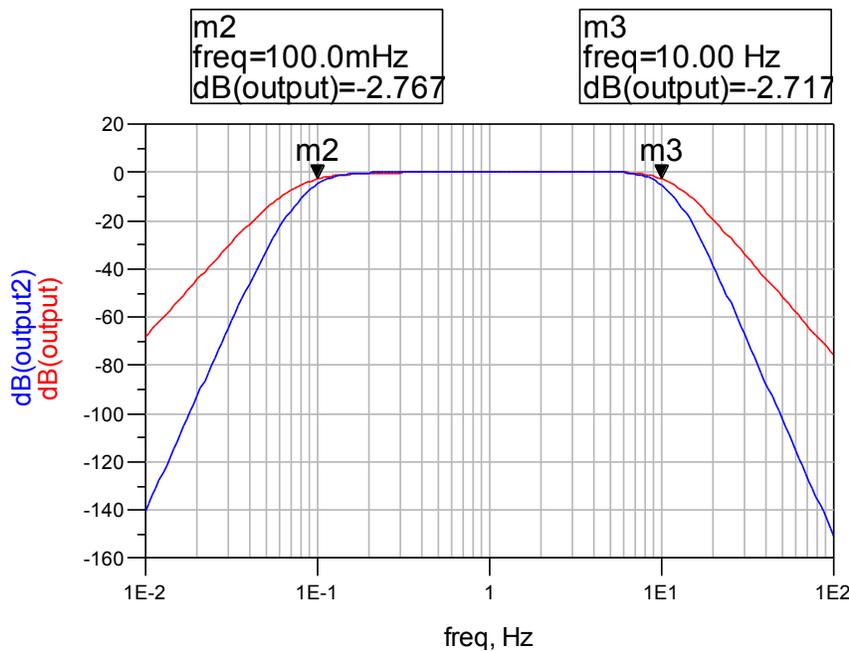


Figure 18: Frequency response of a single filter (red trace) and 2 cascaded filters (blue trace).

***Injector Input/Output Impedances***

<b>J2110A</b>	<b>Impedance</b>
Modulation Input	50 Ohms
Output	25 Ohms
Input	High Z
<b>J2111A</b>	
Modulation Input	50 Ohms
Current Monitor Output	50 Ohms
<b>J2120A</b>	
Modulation Input	10K Ohms
<b>J2140A</b>	
Input	50 Ohms
Output	50 Ohms
<b>J2180A</b>	
Input	High Z
Output	50 Ohms
<b>J2190A</b>	
Input	High Z
Output	50 Ohms
<b>J2112A</b>	
Modulation Input	50 Ohms
Current Monitor Output	50 Ohms

## Chapter 4 - References

### **General**

1. “Switchmode Power Supply Simulation with PSpice and SPICE 3”, by Steven M. Sandler, McGraw-Hill Professional; 1 edition (2006), ISBN: 0071463267
2. “Switch-Mode Power Supply SPICE Cookbook”, by Christophe P. Basso, McGraw-Hill Professional; 1 edition (March 19, 2001), **ISBN:** 0071375090
3. “Power Specialist's App Note Book, Papers on Simulation, Modeling and More”, Edited by Charles Hymowitz, <http://www.intusoft.com/lit/psbook.zip>
4. “Inline equations offer hysteresis switch in PSpice”, Christophe Basso, On Semiconductor, EDN, August 16, 2001
5. “SPICE Circuit Handbook”, by Steven M. Sandler and Charles E. Hymowitz, McGraw-Hill Professional; 1 edition (2006), ISBN: 0071468579

**Conformity with the following European Directives:**

The products herein conform to the requirements of the Low Voltage Directive 2006/95/EC and the EMC Directive 2004/108/EC and go with the CE Marking accordingly.

**Conformity with the following product standards:**

**Manufacturer Name:** Picotest Corp.

**Manufacturer Address:** 5F-1, 286-9, Hsin-Ya Rd, 80673, Kaohsiung, Taiwan

**Declaration of Product**

**Product Name:** Signal Injector

**Model Number:** J2100A, J2101A, J2110A, J2111A, J2170A

**Product Accessories:** This declaration applies to all accessories of the above product(s).

**EMC:**

EN61326-1:2006

**EMI:**

CISPR 11:2003+A1:2004+A2:2006, Class B

EN 61000-3-2:2006 and EN 61000-3-3:2008

**EMS:**

IEC 61000-4-2:2008

IEC 61000-4-3:2008

IEC 61000-4-4:2004 +Corr.1:2006+Corr.2.2007

IEC 61000-4-5:2005

IEC 61000-4-6:2008


IEC 61000-4-11:2004

**Safety:**

IEC61010-1:2001/EN61010-1:2001(2<sup>nd</sup> Edition)

02 Mar, 2011

Date



Mr. Hawk Shang  
General Manager

For more information, please contact your local supplier, sales office or distributor.

**Conformity with the following European Directives:**

The products herein conform to the requirements of the Low Voltage Directive 2006/95/EC and the EMC Directive 98/79/EC and go with the CE Marking accordingly.

**Conformity with the following product standards:**

**Manufacturer Name:** Picotest Corp.

**Manufacturer Address:** 5F-1, 286-9, Hsin-Ya Rd, 80673, Kaohsiung, Taiwan

**Declaration of Product**

**Product Name:** Signal Injector

**Model Number:** J2180A

**Product Accessories:** This declaration applies to all accessories of the above product(s).

**EMC:**

EN61326-1:2006

EN61326-2-1:2006

**EMI:**

CISPR 11:2009 +A1:2010 (Class B)

EN 61000-3-2:2006 +A1:2009 +A2:2009

EN 61000-3-3:2008

**EMS:**

IEC 61000-4-2:2008

IEC 61000-4-3:2010

IEC 61000-4-4:2011

IEC 61000-4-5:2005

IEC 61000-4-6:2008

IEC 61000-4-8:2009

IEC 61000-4-11:2004

**Safety:**

IEC61010-1:2001/EN61010-1:2001(2<sup>nd</sup> Edition)

31 Jul. 2012

Date



Mr. Hawk Shang  
General Manager

For more information, please contact your local supplier, sales office or distributor.